



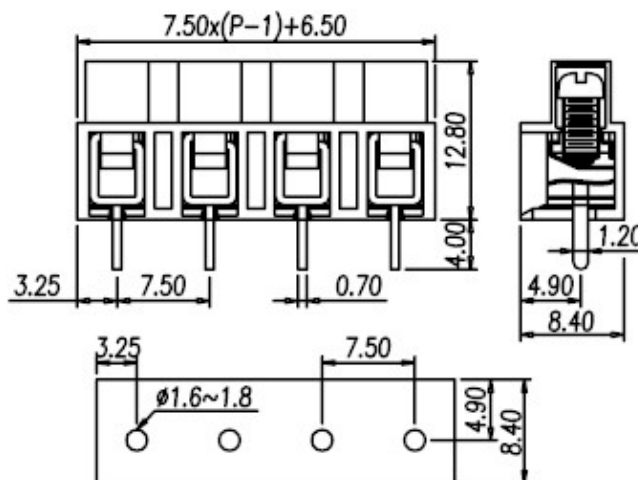

166-..P3

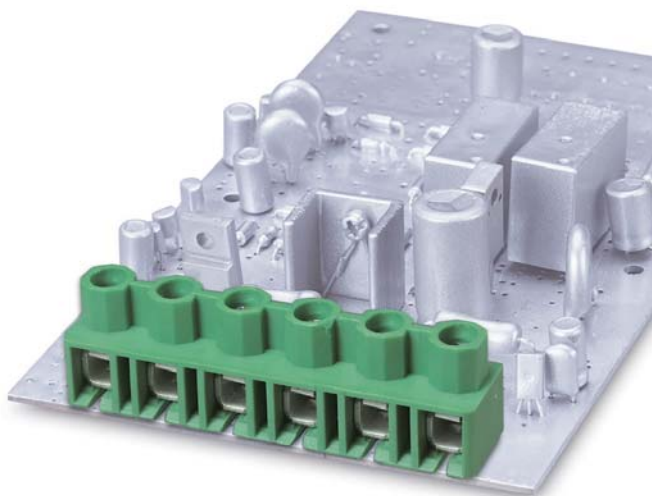

Pitch: 7.50mm

Approval	 	
Technical Data	UL	IEC
Rated voltage	300V	450V
Rated current	12A	32A
Wire range		4mm ²
Solid wire (AWG)	18~12	
Stranded wire (AWG/mm ²)	18~12	
Rated surge voltage (UL/IEC/Max.)	1.6 / 2.5 / 4 KV	
Torque (Lb-in)	3	
Screw	M3	
Wire strip length	6~7mm	
Pole	Cat. No.	
02	166-02P3	
:	:	
:	:	
12	166-12P3	