




Barrier Style Terminal Blocks / 0032-01



0032-0109A

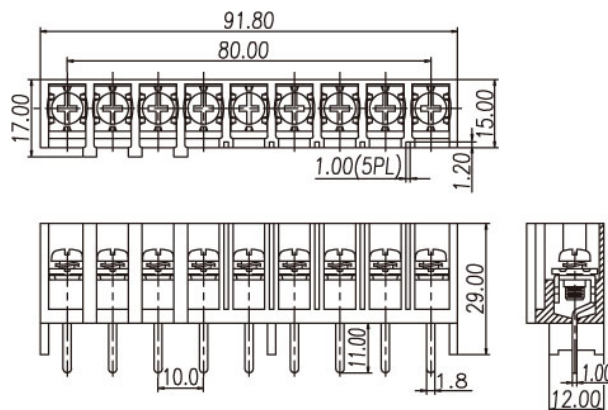

Pitch: 10.00mm

ORDER GUIDE

Approval



FW2

Materials

Rated voltage	300V 600V
Rated current	25A / 5A
Plastic Housing	PBT, UL94V-0, Black
Terminal	Brass, Tin plated
Screw	Steel, M4, Nickel plated

**Specifications**

Working Temperature	-40°C ~ +130°C
Insulation withstand Voltage	AC2200V at 1 minute
Insulation Resistance	1000MΩ or more at DC500V
Wire range	18 ~ 10 AWG
Rated Torque Value	18 Kg - cm

TEL: +886-2-2908-0614**FAX:** +886-2-2908-8549**E-mail:** infor@dinkle.com.tw