



Barrier Style Terminal Blocks / 2D

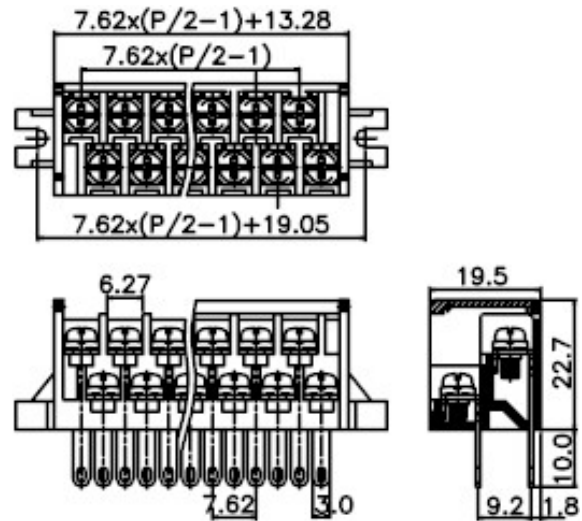

2DX-A02W-XX

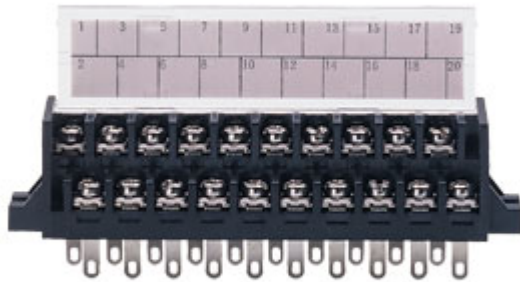

Pitch: 7.62mm

ORDER GUIDE

2D - **02W** -

Pole size: 02×2 ~ 25×2P

A : Mount Ends

B : Barrier Ends

C : With cover

N : Without cover

Approval



FW2

Materials

Rated voltage	300V
Rated current	15A
Plastic Housing	PBT, UL94V-0, Black
Terminal	Brass, Tin plated
Screw	Steel, M3, Nickel plated



Specifications

Working Temperature	-40°C ~ +130°C
Insulation withstand Voltage	AC2000V at 1 minute
Insulation Resistance	1000MΩ or more at DC500V
Wire range	22 ~ 14 AWG
Rated Torque Value	8 Kg - cm

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: infor@dinkle.com.tw