


Barrier Style Terminal Blocks / 4DSC



4DSAX-XX

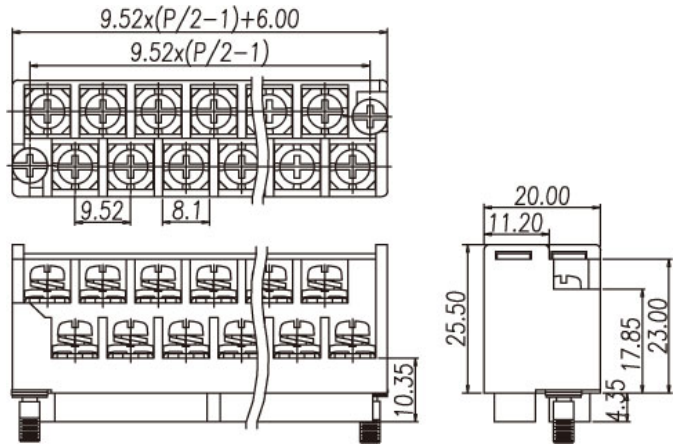

Pitch: 9.52mm

ORDER GUIDE

4DSC - **01** -

Pole size: 8.12.20.22.24.26.30.36P

C : With cover

N : Without cover

Approval



Materials

Rated voltage	300V
Rated current	10A
Plastic Housing	PBT, UL94V-0, Black
Terminal	Brass, 0.8t, Gold plated
Screw	Steel, M3.5, Nickel plated



Specifications

Working Temperature	-40°C ~ +130°C
Insulation withstand Voltage	AC2000V at 1 minute
Insulation Resistance	1000MΩ or more at DC500V
Wire range	18 ~ 14 AWG
Rated Torque Value	12Kg - cm