



**Barrier Style Terminal Blocks / 4DSDC**

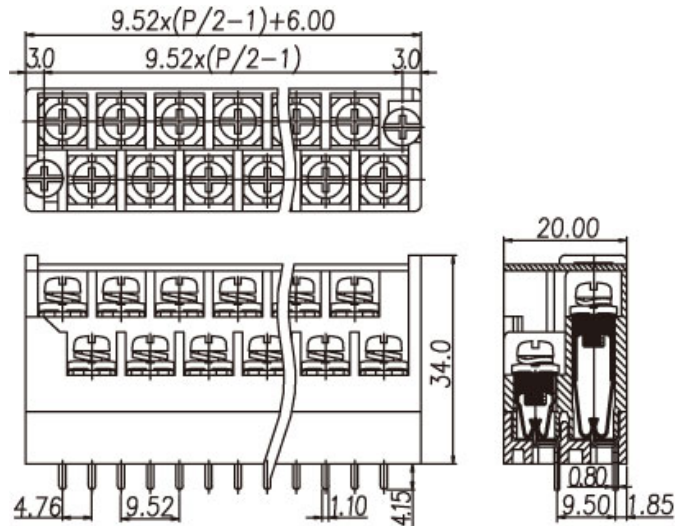

**4DSDCX-01-XX**

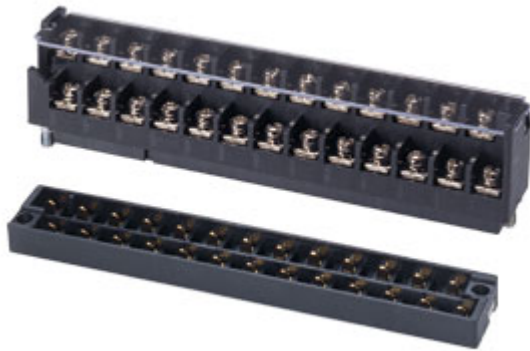

**Pitch: 9.52mm**

**ORDER GUIDE**

**4DSDC**  - **01** -

Pole size: 8.10.12.14.....36P

C : With cover

N : Without cover

Approval



FW2

**Materials**

Rated voltage	300V
Rated current	15A
Plastic Housing	PBT, UL94V-0, Black
Terminal	Brass, Gold plated
Screw	Steel, M3.5, Nickel plated



### Specifications

Working Temperature	-40°C ~ +130°C
Insulation withstand Voltage	AC2000V at 1 minute
Insulation Resistance	1000MΩ or more at DC500V
Wire range	18 ~ 14 AWG
Rated Torque Value	13.8 Kg - cm