


Barrier Style Terminal Blocks / DT-2



DT-2X-B04X-XX

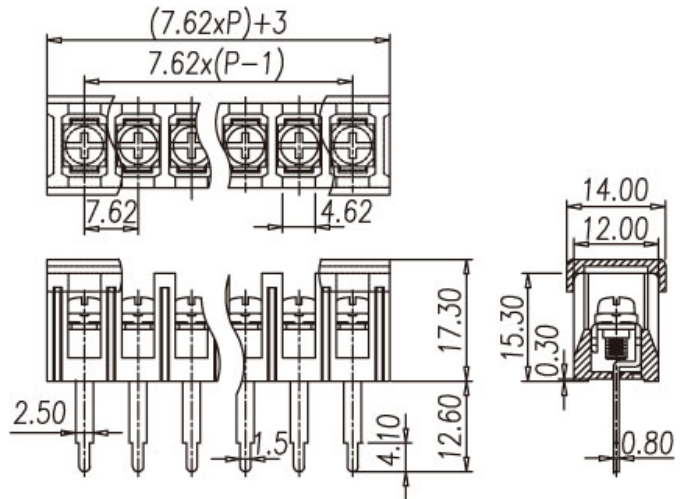

Pitch:7.62mm

ORDER GUIDE

DT - 2 - **04** -

- _____ Pole size: 02~36P
- _____ N : Round head screw
- _____ W : Screw with washer
- _____ A : Mount Ends
- _____ B : Barrier Ends
- _____ C : With cover
- _____ N : Without cover

Approval



FW2

Materials

Rated voltage	300V
Rated current	15A
Plastic Housing	PBT, UL94V-0, Black
Terminal	Brass, Tin plated
Screw	Steel, M3, Nickel plated



Specifications

Working Temperature	-40°C ~ +130°C
Insulation withstand Voltage	AC2000V at 1 minute
Insulation Resistance	1000MΩ or more at DC500V
Wire range	22 ~ 14 AWG
Rated Torque Value	8 Kg - cm

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: infor@dinkle.com.tw