


**Barrier Style Terminal Blocks / DT-31**



**DT-31-B03X-XX**



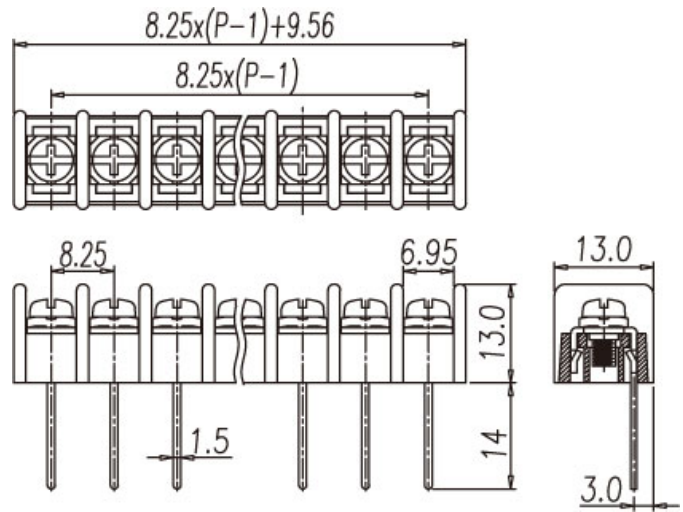

**Pitch: 8.25mm**

ORDER GUIDE

**DT - 31 - [ ] 03 [ ] - [ ] [ ]**

- Pole size: 02~30P
- N : Round head screw
- W : Screw with washer
- A : Mount Ends
- B : Barrier Ends

Approval	 	FW2
<b>Materials</b>		
Rated voltage	250V	
Rated current	20A	
Plastic Housing	PA6.6, UL94V-0, Black	
Terminal	Brass, Tin plated	
Screw	Steel, # 6-32, Nickel plated	



### Specifications

Working Temperature	-40°C ~ +105°C
Insulation withstand Voltage	AC1500V at 1 minute
Insulation Resistance	500MΩ or more at DC500V
Wire range	22 ~ 12 AWG
Rated Torque Value	10 Kg - cm

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: [infor@dinkle.com.tw](mailto:infor@dinkle.com.tw)