


Barrier Style Terminal Blocks / DT-66



DT-66-B01W-XX

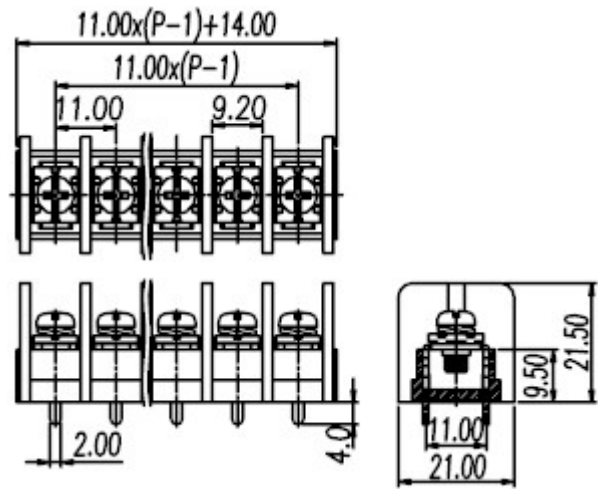

Pitch: 11.00mm

ORDER GUIDE

DT - 66 - 01W -

Pole size: 02~26P

A : Mount Ends

B : Barrier Ends

C : With cover

Approval



FW2

Materials

Rated voltage	600V
Rated current	40A
Plastic Housing	PBT, UL94V-0, Black
Terminal	Copper, Tin plated
Screw	Steel, M4, Nickel plated



Specifications

Working Temperature	-40°C ~ +130°C
Insulation withstand Voltage	AC2000V at 1 minute
Insulation Resistance	1000MΩ or more at DC1000V
Wire range	18 ~ 8 AWG
Rated Torque Value	17.8 Kg - cm

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: infor@dinkle.com.tw