


**Barrier Style Terminal Blocks / DT-66**



**DT-66-C01W-XX**

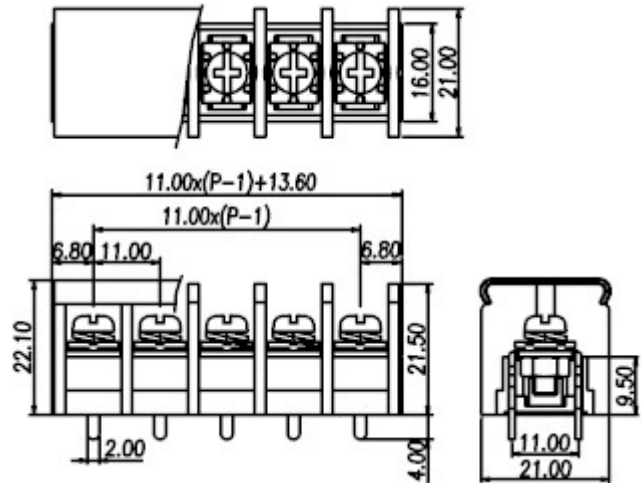

**Pitch: 11.00mm**

**ORDER GUIDE**

**DT - 66 -  01W -**

Pole size: 02~24P

A : Mount Ends

B : Barrier Ends

C : With cover

Approval



FW2

**Materials**

Rated voltage	600V
Rated current	40A
Plastic Housing	PBT, UL94V-0, Black
Terminal	Copper, Tin plated
Screw	Steel, M4, Nickel plated



### Specifications

Working Temperature	-40°C ~ +130°C
Insulation withstand Voltage	AC2000V at 1 minute
Insulation Resistance	1000MΩ or more at DC1000V
Wire range	18 ~ 8 AWG
Rated Torque Value	17.8 Kg - cm

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: [infor@dinkle.com.tw](mailto:infor@dinkle.com.tw)