






DIN Rail terminal blocks / DK series



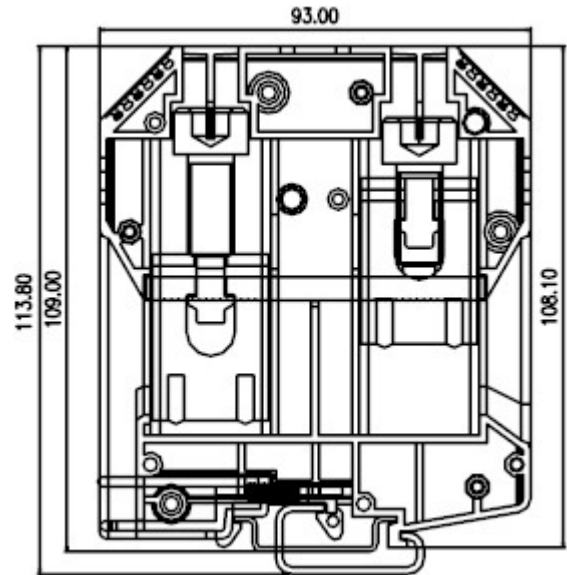

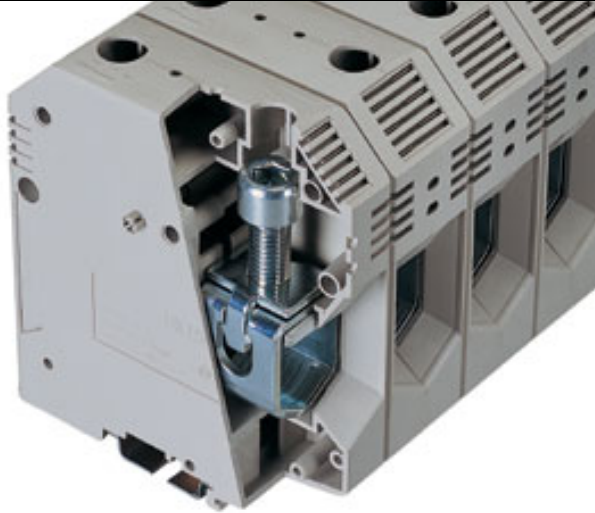

DK150



TxHxW(+0.2mm) 31x109x93

Approval	  	
Technical Data	UL	IEC
Rated voltage	600V	1000V
Rated current	275A	309A
Wire range		
Solid wire (AWG mm ²)	2~300 (125A)	35~150
Stranded wire (AWG mm ²)	2~300	35~150
Rated surge voltage (UL/IEC/Max.)	2.2 / 3.5 / 8 KV	
Torque (Lb-in)	165	
Screw	M10	
Wire strip length	30~40mm	



Accessories	Cat. No.	
End cover		
Partition		
Small partition		
Cross jumper - central type		
Cross jumper - cage inserting type	CSC-150	02P
		03P
Busbar		
Suitable plugs		
Marking label		TM14
Suitable rail		TS-35
		TS-32
Tool		SD10
Optional color	Cat. No.	
		DK150-RD
		DK150-BL
		DK150-BK
		DK150-OR