






DIN Rail terminal blocks / DK series



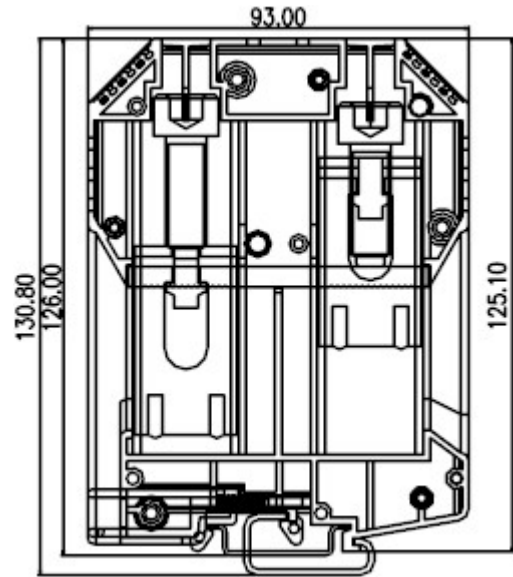

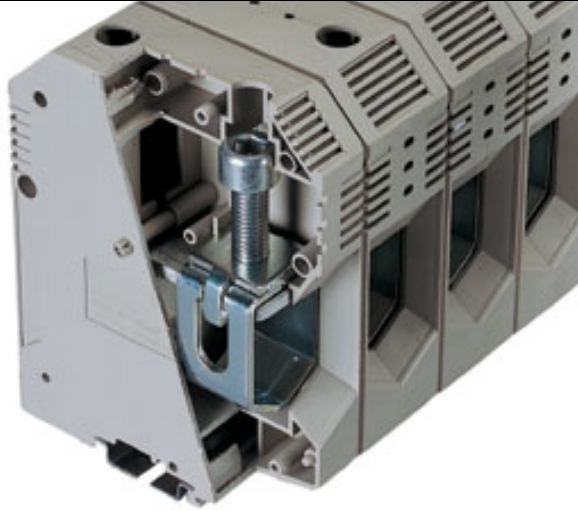

DK240



TxHxW 36x126x93

Approval	  	
Technical Data	UL	IEC
Rated voltage	600V	1000V
Rated current	370A	415A
Wire range		
Solid wire (AWG mm ²)		95~240
Stranded wire (AWG mm ²)	300~500	95~240
Rated surge voltage (UL/IEC/Max.)	2.2 / 3.5 / 8 KV	
Torque (Lb-in)	165	
Screw	M10	
Wire strip length	35~40mm	



Accessories	Cat. No.	
End cover		
Partition		
Small partition		
Cross jumper - central type		
Cross jumper - cage inserting type	CSC-240	02P
		03P
Busbar		
Suitable plugs		
Marking label		TM14
Suitable rail		TS-35
		TS-32
Tool		SD10
Optional color	Cat. No.	
		DK240-RD
		DK240-BL
		DK240-BK
		DK240-OR