



DIN Rail terminal blocks / DK series



DK35H

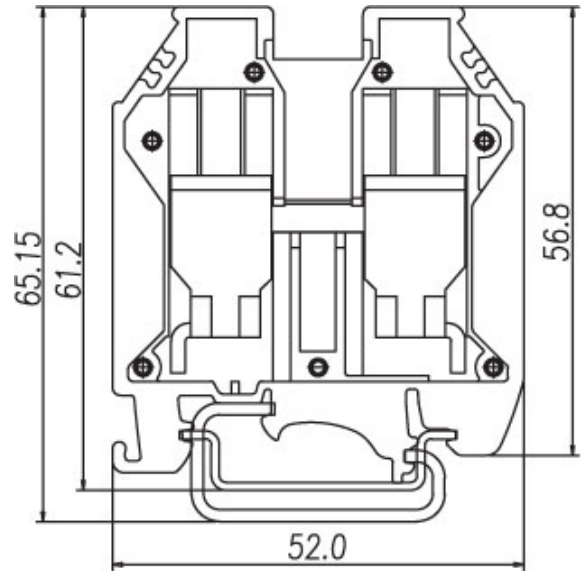

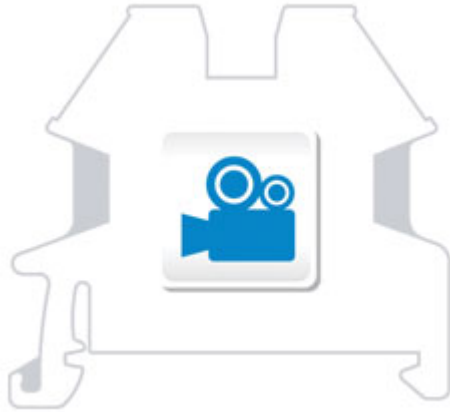



TxHxW 16x61.2x52

Approval		
Technical Data	UL	IEC
Rated voltage	600V	630V
Rated current	150A	150A
Wire range		
Solid wire (AWG mm ²)	12~1/0	2.5~50
Stranded wire (AWG mm ²)	12~1/0	2.5~50
Rated surge voltage (UL/IEC/Max.)	2.2 / 2.5 / 8 KV	
Torque (Lb-in)	57	
Screw	M6	
Wire strip length	16~18mm	



Accessories	Cat. No.	
End cover		
Partition		
Small partition	DKSPS-006	
Cross jumper - central type	DS35	02P
		03P
		10P
Cross jumper - cage inserting type	CSC-35	02P
		03P
		10P
Suitable plugs		
Marking label	TM14	
Suitable rail	TS-35	
	TS-32	
Tool	SDM6.5	

Optional color	Cat. No.
	DK35H-RD
	DK35H-BL
	DK35H-BK
	DK35H-OR