



DIN Rail terminal blocks / DKES series

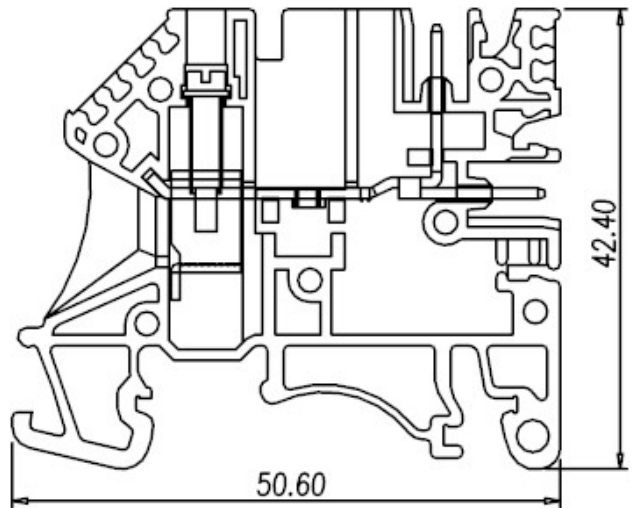

DKES1.5M

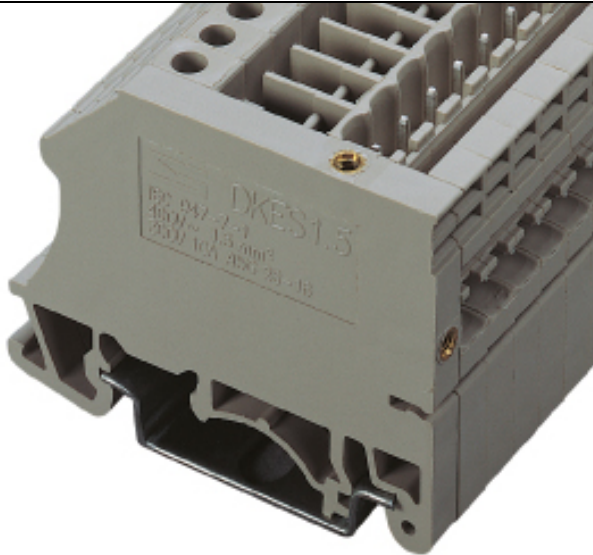

TxHxW 5.08x42.4x50.6

Approval		
Technical Data	UL	IEC
Rated voltage	300V	300V
Rated current	20A	24A
Wire range		
Solid wire (AWG mm ²)	22~12	0.5~2.5
Stranded wire (AWG mm ²)	22~12	0.5~2.5
Rated surge voltage (UL/IEC/Max.)	1.6 / 2 / 5 KV	
Torque (Lb-in)	6.9	
Screw	M3	
Wire strip length	7~8mm	

Accessories	Cat. No.	
End cover (Left)	DKES1.5MCA	
(Right)	DKES1.5MCB	
Cover	DKESP1.5	
Cross jumper - central type	DS2.5	02P
		03P
		10P
Cross jumper - cage inserting type	CSC-2.5	02P
		03P
		10P
Suitable plugs	2ESDV	2ESDVM
	2ESDP	2ESDPM
	2ESDT	
	2ESDF	2ESDFM
	2WSDV	
Marking label	TM20 , TM26	
Suitable rail	TS-35	
	TS-32	
Tool	SDM3.0	

DKES1.5MCA



DKES1.5MCB

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: infor@dinkle.com.tw