



DIN Rail terminal blocks / UDK series

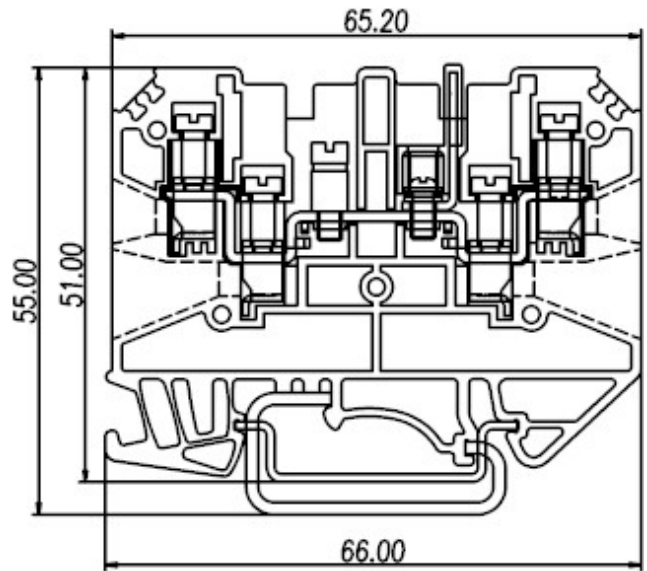

UDK4

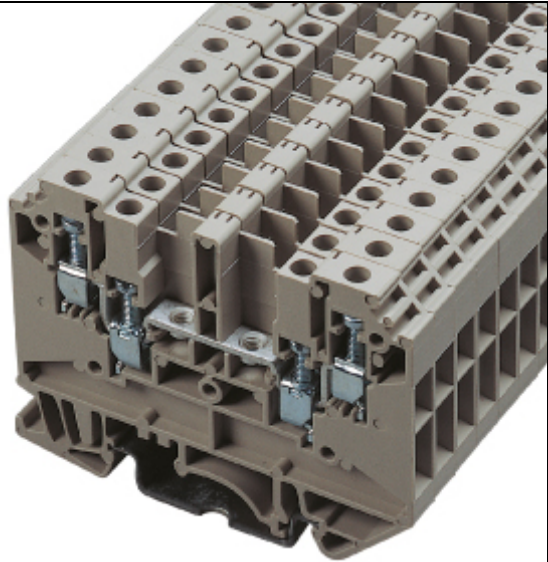

TxHxW 7.6x55x66

Approval		
Technical Data	UL	IEC
Rated voltage	300V	660V
Rated current	16A	32A
Wire range		
Solid wire (AWG mm ²)	22~12	0.5~4
Stranded wire (AWG mm ²)	22~12	0.5~4
Rated surge voltage (UL/IEC/Max.)	1.6 / 2.5 / 8 KV	
Torque (Lb-in)	6	
Screw	M3	
Wire strip length	6~7mm	



Accessories	Cat. No.	
End cover	UDK4C	
Partition		
Small partition	DKSPS-007	
Cross jumper - central type	DS4	02P
		03P
		10P
Cross jumper - cage inserting type	CSC-4	02P
		03P
		10P
Suitable plugs		
Marking label	TM21	
Suitable rail	TS-35	
	TS-32	
Tool	SDM3.0	

Optional color	Cat. No.
	UDK4-RD
	UDK4-BL
	UDK4-BK
	UDK4-OR