





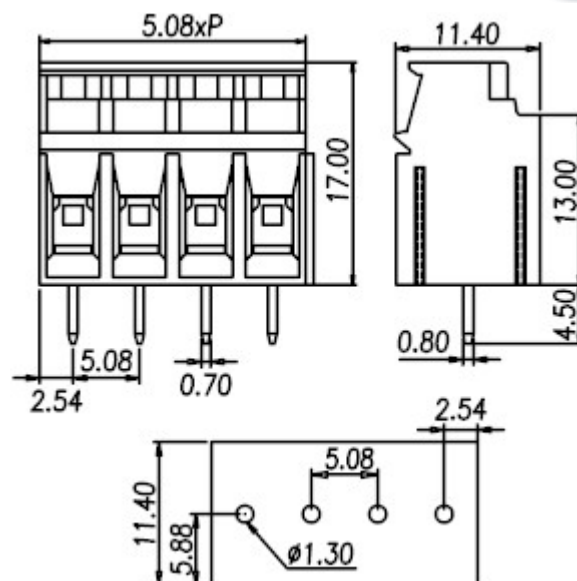


**ESK508V**

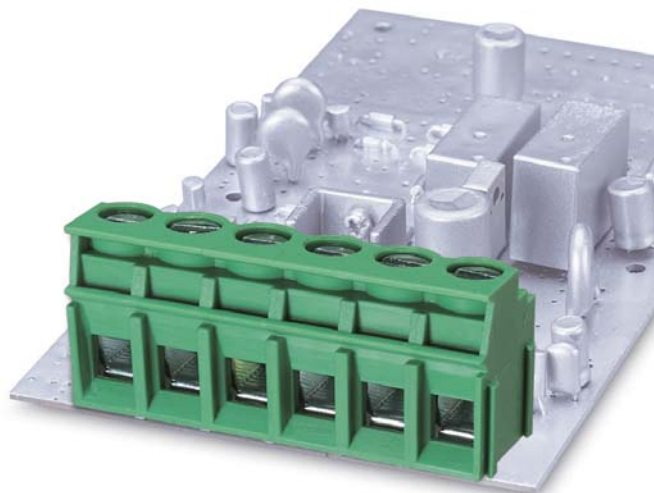

**Pitch: 5.08mm**

Approval	  	
Technical Data	UL	IEC
Rated voltage	300V	250V
Rated current	23A	24A
Wire range		2.5mm <sup>2</sup>
Solid wire (AWG)	26-12	
Stranded wire (AWG/mm <sup>2</sup> )	26-12	
Rated surge voltage (UL/IEC/Max.)	2.2 / 2 / 4 KV	
Torque (Lb-in)	7	
Screw	M3	
Wire strip length	10-11mm	
Pole	Cat. No.	
02	ESK508V-02P	
:	:	
:	:	
12	ESK508V-12P	