



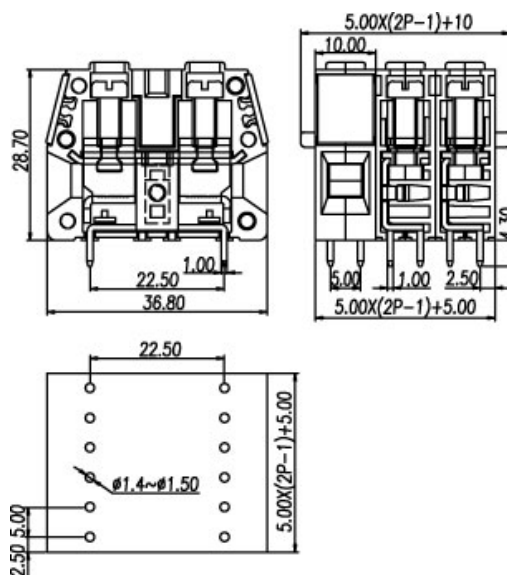

## PDS-10S

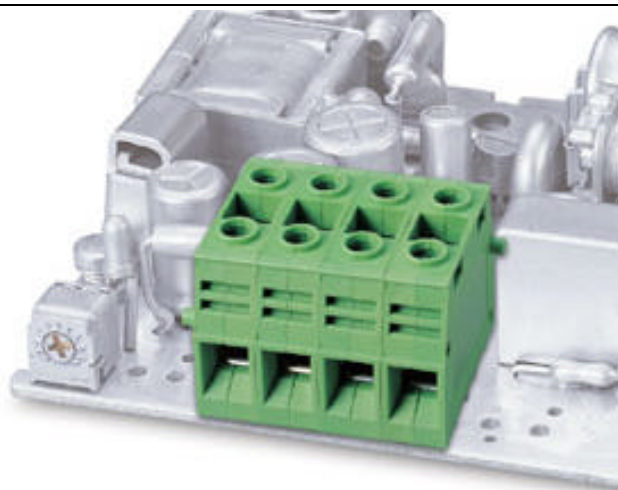

**Pitch: 10.00mm**

Approval		
Technical Data	UL	IEC
Rated voltage	300V	250V
Rated current	65A	57A
Wire range		10mm <sup>2</sup>
Solid wire (AWG)	24~6	
Stranded wire (AWG/mm <sup>2</sup> )	24~6	
Rated surge voltage (UL/IEC/Max.)	1.6 / 2 / KV	
Torque (Lb-in)	13	
Screw	M4	
Wire strip length	12~13mm	
Pole	Cat. No.	
01	PDS-10S-01	
02	PDS-10S-02	
03	PDS-10S-03	
:	:	