



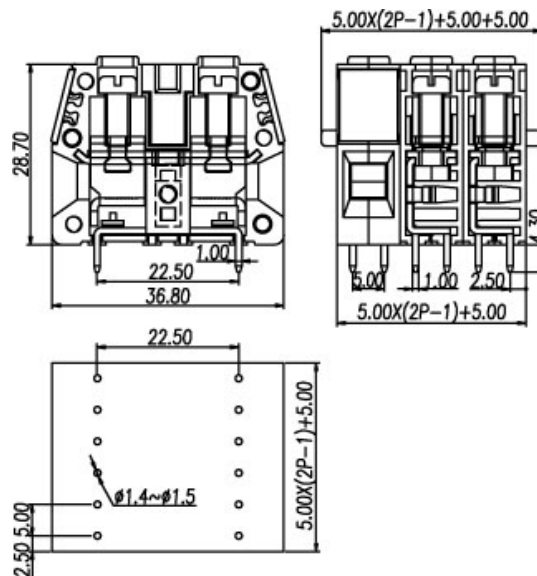

PDS-10SA

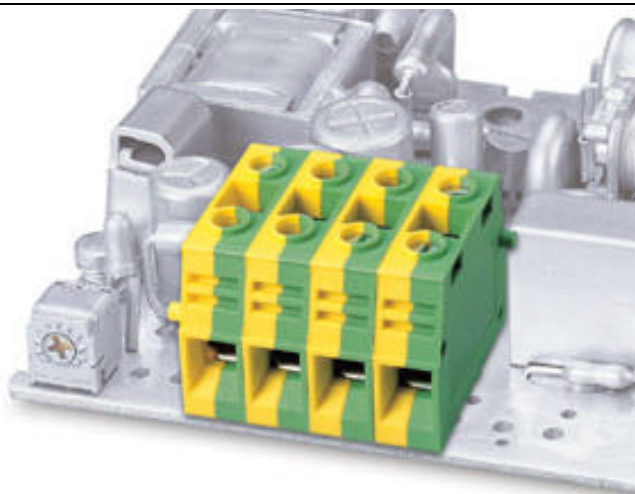

Pitch: 10.00mm

Approval		
Technical Data	UL	IEC
Rated voltage	300V	250V
Rated current	65A	57A
Wire range		10mm ²
Solid wire (AWG)	24~6	
Stranded wire (AWG/mm ²)	24~6	
Rated surge voltage (UL/IEC/Max.)	1.6 / 2 / KV	
Torque (Lb-in)	13	
Screw	M4	
Wire strip length	12~13mm	
Pole	Cat. No.	
01	PDS-10SA-01	
02	PDS-10SA-02	
03	PDS-10SA-03	
:	:	